


SHIELDS HOSE

Exhaust/Fuel

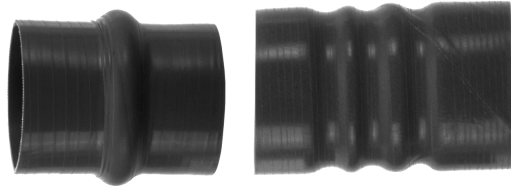

SINGLE HUMP

DOUBLE HUMP

- Provides Angular And Longitudinal Vibration Absorbtion In Wet Exhaust Systems
- Corrects Slight Offset In Pipes

Blue silicone cover with smooth finish for easy clean up. Stable at elevated temperatures. Resistant to: exhaust fumes, ozone, mild chemicals, antifreeze, salt water.

Temperature range: -20° to +350° F

Meets SAE J2006 Type R1

SILICONE SINGLE/DOUBLE HUMP COUPLERS

SINGLE HUMP

I.D.	Length	Lbs./Ft.	14" Length Code No.
4"	4"	1.375	16-272-4000
5"	4"	1.718	16-272-5000
6"	8"	2.062	16-272-6000
8"	8"	2.750	16-272-8000
10"	12"	3.437	16-272-10000

DOUBLE HUMP

I.D.	Length	Lbs./Ft.	14" Length Code No.
6"	14"	2.145	16-274-6000
8"	14"	2.860	16-274-8000
10"	14"	3.575	16-274-10000



Your source for **ISO 7840 Fuel Hose**

INTERNATIONAL MARINE CERTIFICATION INSTITUTE HOSES:

16-360-0140	16-360-0380	16-360-0580	16-350-1580	16-350-2000
16-360-0560	16-360-0120	16-350-1120	16-350-1780	16-350-2380


SHIELDS FIRE-ACOL FUEL FEED VENT HOSE

- Fuel Feed – Gas Or Diesel
- Fuel Vent – Gas Or Diesel
- For Pleasure Boats Only

Resists gasoline/alcohol blends. Compounded for low permeation. Reinforced with 2 spirals of high strength fabric.

Temperature range: -5° to 180° F

Meets SAE J1527 Type A1, and ISO 7840 Type A1
NMMA/CE Type Accepted

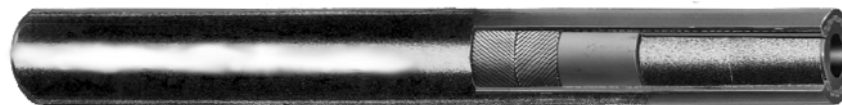

I.D.	O.D.	Ply	Burst Pressure	Wt. "C"	Bulk Pack 250' Roll Code #	50' R/O Ctn. Code #	10' Polypac Code #
1/4"	19/32"	2	250#	15	16-360-0140	16-360-0146	16-360-0143
5/16"	11/16"	2	250#	18	16-360-0560	16-360-0566	16-360-0563
3/8"	25/32"	2	250#	21	16-360-0380	16-360-0386	16-360-0383
1/2"	27/32"	2	250#	24	16-360-0120	16-360-0126	16-360-0123
5/8"	1 1/32"	2	175#	38	16-360-0580	16-360-0586	16-360-0583